PATENT ABSTRACTS OF JAPAN

(11)Publication number:

2001-170028

(43) Date of publication of application: 26.06.2001

(51)Int.CI.

A61B 5/107 G01N 33/50

(21)Application number: 11-358037

(71)Applicant: LION CORP

(22)Date of filing:

16.12.1999

(72)Inventor: KOTAKE YUKI

MOTOYAMA JUNKO

(54) INSTRUMENT FOR MEASURING COARSENESS OF SKIN TEXTURE AND SKIN TEXTURE EVALUATION KIT (57) Abstract:

PROBLEM TO BE SOLVED: To provide a method for measuring the skin texture in which the objective judgement of the level of the coarseness on the skin surface and the level of improvement of the coarseness by cosmetics, etc., are inexpensively, easily, and quantitatively expressed in numerical value and a general user easily measures the coarseness without professional knowledge and easily understands the meaning the evaluation.

SOLUTION: A point where at least three skin grooves meet on the skin surface shall be one crossing point. By counting the number of the crossing points per unit area or counting the average area per one crossing point, the coarseness of skin texture is measured and evaluated. The skin texture coarseness evaluation kit is used for the measurement and evaluation of the coarseness of skin texture in the above method.

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

JPO and NCIPI are not responsible for any damages caused by the use of this translation.

- 1. This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.**** shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

CLAIMS

[Claim(s)]

[Claim 1] How to measure the texture granularity of the skin by making into one intersection the point that three or more leather slots meet on a skin front face, and measuring the intersection number per unit area, or measuring the average area per intersection. [Claim 2] The evaluation approach of the skin age characterized by analyzing the texture granularity of the skin measured by the approach according to claim 1 with a statistical means in relation with age.

[Claim 3] The judgment approach of the effectiveness of the cosmetics characterized by carrying out comparison analysis of the texture granularity of the skin measured by the approach according to claim 1 due to the existence of application, or some of dosages before and after application of cosmetics or a drug effect component, or a drug effect component.

[Claim 4] The kit for texture evaluation of the skin which consists of following (a) - (c).

(a) The (frame c) texture granularity judging table for measurement for measuring the intersection number on the replica (ingredient b) replica which copies the texture on the front face of the skin

JPO and NCIPI are not responsible for any damages caused by the use of this translation.

- 1. This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.*** shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

DETAILED DESCRIPTION

[Detailed Description of the Invention]

[1000]

[Field of the Invention] This invention evaluates the improvement effect of texture granularity which the granularity and skin external preparations of the texture which changes with individuals have in a detail more objective about the approach of measuring the granularity (or fineness of a texture) of the texture of the skin, and relates to the kit for evaluation of the measuring method of the granularity of the texture offered as an index which is easy to understand not only to an expert but to a general user, and texture granularity.

[Description of the Prior Art] the "texture" of the skin -- a leather slot -- leather -- it is the crest formed from a hill, and texture granularity is well known as an important factor which participates in the beauty of the skin. Therefore, it is very important on cosmetics to measure and evaluate this texture granularity and to grasp that extent exactly.

[0003] The approach of photoing the replica which copies the shape of skin surface type conventionally, using silicone rubber etc. as a measuring method of the texture granularity currently performed, or a direct skin front face, and evaluating by computer image analysis is common. As such an approach, equipments, such as ** replica camera base, the xenon light source, a television camera, and an image analyzer, are used. As a texture granularity parameter Photo the shadow produced by illuminating parallel light on a replica, and it carries out binarization on fixed level after smoothing amendment about the inputted image. approach [wood Teruji et al. who extracts the shadow field by the leather slot and measures leather slot spacing -; J.Soc.Cosmet.Chem.Jpn.27(3)355-373 and 1993] -- Equipments, such as UV stroboscope light source, a CCD camera, and a digitizer, are used. ** As a texture granularity parameter Approach [Mototsugu Takahashi who inputs into a digitizer the image caught with the CCD camera, creates a binarization image in quest of the luminance distribution of the whole image, and measures the consistency of a leather slot with the whole total number of black pixels; a present age dermatology compendium, annual-publication version 90-B, P13, and 1990(Nakayama Shoten)] are known.

[0004] However, the general user was unable difficult for the above-mentioned approach to need the picture input device of the expensive replica and the expensive skin, and advanced image-analysis software, to be unable to interpret the mathematical parameter which shows a result as his not being an expert, and to grasp the condition of a texture.

[0005] Moreover, the irregularity of a skin replica is taken in and digitized with a surface roughness plan as an appraisal method of a texture intelligible for a general user, a power spectrum is obtained with the Fourier transform, and the approach of outputting the amplitude of this power spectrum as a sound is also being developed as a texture granularity parameter in recent years (JP,4-305113,A; JP,5-146412,A). However, it is impossible to need expensive equipment and advanced image-analysis software by this approach, to be the amplitude of the power spectrum obtained as a result, for a general user to understand that semantics, although the quality of a relative texture can be judged, and to grasp quantitive texture level.

[0006] Moreover, the notch which can foresee the measuring object skin is formed in the part with the checkered substrate of the magnitude which is extent which can cover a part of face, the representation sample photograph of the type of a texture is displayed on the checkered substrate front face very near said notch several sorts as a texture granularity parameter, and the method of grasping the condition of a texture is also proposed by comparing with this (JP,9-262135,A). However, by this approach, in order to compare with the sample photograph of only 3-4 steps of textures, evaluation of an accurate texture was impossible and was that a general user cannot judge effectiveness of cosmetics etc. to be.

[0007]

[Problem(s) to be Solved by the Invention] As mentioned above, the mathematical parameter which the conventional approach needs expensive equipment and advanced image-analysis software, and shows the condition of the obtained texture was what the general user who does not have a know how cannot understand. Moreover, it was simple, and precision was inferior in the thing intelligible for a general user, and its quantum nature was inadequate.

[0008] Therefore, it can express numerically simple and quantitatively, and this invention can measure easily improvement extent of the objective judging of the texture granularity level on the front face of the skin, and the texture granularity by cosmetics etc. also to cheapness and the general user who does not have a know how, and makes it a technical problem to offer measurement and the appraisal method of the texture granularity which is easier to understand the semantics. [0009]

[Means for Solving the Problem] Wholeheartedly, as a result of research, by acquiring knowledge that the intersection number of the leather slot on the skin has texture granularity and fixed relation, and using this as an index, this inventions find out that objective and

quantitive evaluation of texture granularity is possible, and came to complete this invention. [0010] That is, this invention consists in the following (1) - (4).

- (1) How to measure the texture granularity of the skin by making into one intersection the point that three or more leather slots meet on a skin front face, and measuring the intersection number per unit area, or measuring the average area per intersection.
- (2) The evaluation approach of the skin age characterized by analyzing the texture granularity of the skin measured by the approach of the above-mentioned (1) publication with a statistical means in relation with age.
- (3) The judgment approach of the effectiveness of the cosmetics characterized by carrying out comparison analysis of the texture granularity of the skin measured by the approach of the above-mentioned (1) publication due to the existence of application, or some of dosages before and after application of cosmetics or a drug effect component, or a drug effect component.
- (4) The kit for texture evaluation of the skin which consists of following (a) (c).
- (a) The (frame c) texture granularity judging table for measurement for measuring the intersection number on the replica (ingredient b)

replica which copies the texture on the front face of the skin [0011]

[Embodiment of the Invention] In this invention approach, in case texture granularity is measured, a drawing explains "the point that three or more leather slots meet on a skin front face" set as the object of measurement. Drawing 1 is a skin front face or the mimetic diagram which expanded the condition of the replica copied from there, the leather slot 1 on the skin — leather — it is running aslant [in every direction] on the skin, surrounding a hill 2. A black dot 3 specifies one of the points that three or more leather slots meet. Thus, in this invention, the number is measured by making into an "intersection" the point that three or more leather slots meet. [0012] If the part which measures an intersection number is a skin front face, there is especially no limit, for example, it can be applied to the part of arbitration, such as the face and an arm.

[0013] Measurement of texture granularity is performed by measuring the intersection number per unit area on the skin, or measuring the average area per intersection. Since the inclination (that is, texture fineness is lost) for an intersection number to decrease is seen as age becomes high so that a postscript may be carried out, as for the unit area for intersection number measurement here, it is desirable to set up suitably according to a test subject's age. For example, in targeting even his 30's with a comparatively fine texture, it sets up the unit area of 2 0.25cm, and when aimed or more at his 40's with a comparatively coarse texture, the unit area of 2 can be set up 1cm. But since the granularity and fineness of a texture have big width of face according to conditions, such as frequency of sex, health condition, and skin care, in addition to age and individual difference is also large, the above-mentioned area value is a strictly temporary standard, and it is desirable to prepare so that it can usually measure with some kinds of unit areas. It is desirable to calculate the average from the measurement result of the intersection number of several places on the occasion of measurement. What is necessary is on the other hand, to compute the area per intersection and just to ask for the average from one or more intersection numbers measured in within the limit [of the area set up suitably], in measuring the average area per intersection.

[0014] In case an intersection number is measured, it is desirable to use the frame for measurement. Especially constraint does not have this frame for measurement in that quality of the material, configuration, etc., and it just observes and measures an intersection in the frame of fixed area. For example, that in which the frame of predetermined area, such as a square and a round shape, was prepared is suitably used for members, such as the shape of tabular [which was made with the quality of the material of paper, synthetic resin, glass, etc. / thin], and a film. This frame can mention what there will be no constraint especially if it is a means by which fixed area can be specified, for example, was drawn on a part or all of the above-mentioned member in a slot, ink, etc., that from which the predetermined area in the above-mentioned member was excised, the thing which stuck the still more transparent members (example; glass, synthetic-resin film, etc.) to the excision part concerned, etc.

[0015] Moreover, although measurement of an intersection number can be performed in a direct skin front face, it is also possible to carry out on the replica copied by applying a replica ingredient to the skin, for example. Although a thing, a celluloid plate (law: SUMP Suzuki's universalmicroprinting law), etc. of 2 liquid mixing type which trickles a curing agent into silicone rubber are mentioned as a replica ingredient, for example, if the texture on the front face of the skin is observable, it can use without constraint especially. These are also contained in the replica ingredient of this invention, although an accessory may be used, for example, the sheet (the quality of the material like the tracing paper with which silicon cannot permeate easily) for stirring liquid by the abovementioned 2 liquid mixing type, a stirring spoon (what can be stirred well [without / like putty / foaming]), etc. may be used, in case a replica is carried out.

[0016] The above-mentioned approach can estimate texture granularity easily by comparing the obtained measurement result with a statistical data, although it is possible to measure the texture granularity of the skin. That is, skin age can be evaluated by, for example, analyzing the texture granularity of the skin measured by the above-mentioned approach with a statistical means in relation with age. Evaluation in this case is performed by comparing the measured intersection number with the judgment table having shown texture granularity level intelligibly. This texture granularity judging table evaluates that result intelligibly from the sample of a large number from which age and sex differ by creating the calibration curve which shows the relation between age and the intersection number per unit area (or area per intersection), and makes it the tabular format according to age. Here, the intersection number of 218 man and woman from 0 years old to 65 years old was measured as an example. The judgment table created based on the calibration curve acquired as a result is shown as the following table 1, Table 2, and Table 3. Moreover, the calibration curve corresponding to Table 1, Table 2, and Table 3 is shown in drawing 2, drawing 3, and drawing 4, respectively.

[0017] [Table 1]

[Table I]		
	交点数(個/(). 25 c m ²)
年 齢	男 子	女 子
0	2 1 0	210
5	200	205
10	180	200
1 5	160	180
20	110	130
2 5	90	100
3 0	70	8 0
3 5	6 0	70
4 0	5 0	50
4 5	4 0	4 0
5 0	3 0	3 0
5 5	20	3 0
6 0	20	20
6 5	10	2 0

[0018] [Table 2]

	交点数(個	/ c m ²)
年齢	男 子	女 子
0	8 4 0	840
5	800	820
10	720	800
15	620	700
20	450	500
2 5	360	400
3 0	280	320
3 5	250	280
4 0	180	200
4 5	140	160
5 0	100	120
5 5	90	100
6.0	7 0	80
6.5	5 0	60

[0019] [Table 3]

	面積 (μm²/交点)		
年 齢	男 子	女 子	
0	1 2	1 2	
5	13	1 2	
1 0	14	13	
15	16	1 4	
20	2 2	20	
2 5	28	2 5	
3.0	36	3 1	
3 5	40	36	
4 0	56	5 0	
4 5	7 1	63	
5 0	100	8 3	
5 5	111	100	
6 0	143	125	
6.5	200	167	

[0020] The judgment table where setting the judgment table showing in Table 1 as 2 0.25cm, and showing the unit area of intersection number measurement in Table 2 sets this unit area as 2 1cm. Moreover, the judgment table showing in Table 3 shows the area per intersection. Since texture granularity level changed with sex, it another ******(ed) man and woman in the judgment tables 1-3. A user can do evaluation of texture granularity level by using the judgment table corresponding to the magnitude of the frame used for measurement, and contrasting with a measurement result. By using this judgment table, since a user can grasp quantitatively and simple in which level its texture granularity is, he is advantageous. Moreover, it is also possible to grasp change quantitatively by measuring and comparing the intersection number before and behind use etc. about whether the granularity of a texture has improved by cosmetics, use of a drug effect component, etc. That is, effectiveness, such as cosmetics and a drug effect component, can be judged by carrying out comparison analysis of the texture granularity of the skin measured by the approach of the above-mentioned publication due to the existence of application, or some of dosages before and after application, such as cosmetics and a drug effect

[0021] The instrument used for the measurement and evaluation of texture granularity by this invention and a judgment table can also be used as the kit equipped with these all together. The texture evaluation kit of the skin by this invention contains following (a) - (c) at least.

(a) The (frame c) texture granularity judging table for measurement for measuring the intersection number on the replica (ingredient b) replica which copies the texture on the front face of the skin [0022] The thing of the above [the instrument of (a) - (c) which constitutes a kit etc.] is used, and the operation and evaluation means are performed according to this invention approach. [0023] It is as follows when examples, such as operation of this invention kit, are given. The above mentioned thing was used as a replica ingredient (a) and a texture judging table (c). The frame for measurement for counting the intersection number of a replica (b) was made into the square, and some kinds, such as 1cm (it is an object about the 40th coarse generation of a texture or subsequent ones) around and 0.5mm (it is an object even about his 30's with a fine texture) around, were prepared so that it might be properly used with an evaluation candidate's texture granularity level. Here, this invention kit may include the clip to which the magnifier for making a count easy, the cellophane (it is good anything if it is the thing of transparence) stuck on a replica in order to count marking, said cellophane, etc. are stopped. If the counter pen with which a count is furthermore displayed with marking is included, it is much more convenient.

[0024] First, a user mixes a replica agent with putty on a sheet, and he plasters the part which wants to evaluate a face, looking at a mirror. A replica is stripped after 3 minutes, the transparent frame which limits the count range on it is carried, and cellophane is carried further, and it presses down with a clip so that it may not shift. Marking is carried out with the counter pen, using a magnifier,

and the intersection number within the limit is counted. As described above, a count makes one intersection the point that three or more leather slots on a skin front face meet, and is performed by measuring an intersection number within the limit (refer to drawing 1). Evaluation of texture granularity is performed by reading the age corresponding to an intersection number in a texture granularity judging table (c).

[0025]

[Example] Next, this invention is not restrained by these although an example and the example of a trial explain this invention to a detail further.

[0026] Texture granularity level evaluation of example 1 Homo sapiens: A different evaluator from a test subject measured texture granularity level about the 35 years-old female test subject binary name (A, B). SILFLO (British FLEXICO DEVELOPMENTSLTD. company make) was used as a replica agent. Since a replica would not become hard well if oil exists in an examined part, the charge of washing its face (cream-like cleaning agent constituent) shown in Table 4 could be used for the test subject, and he was made to wash one's face.

[0027] [Table 4]

[Table 4]	
成 分	配合量(質量%)
ラウリン酸	2. 0
ミリスチン酸	18.0
パルミチン酸	8. 0
ステアリン酸	8. 0
N-ラウロイル-N-メチル	3. 0
-β-アラニンカリウム	
N-ラウロイルグルタミン酸	2. 0
モノカリウム塩	
水酸化カリウム	5. 5
グリセリン	5.0
PEG4000	5.0
ソルビトール	6.0
オレイルアルコール	1. 0
精製ラノリン	0. 5
植物性スクワラン	0. 5
カチオン化セルロース (*1)	0. 5
ヒドロキシエタンジホスホン酸	0. 1
エデト酸四ナトリウム四水塩	0. 2
塩化カリウム	0. 2
香料	2. 0
精製水	バランス

*1; ライオン化学製XM-503LN若しくはレオガードGP またはUCC社製ポリマー-JR400

[0028] Moreover, since the condition of a texture would change if accompanied by stress, the chair with which the collapse type was calm was laid on the occasion of measurement, and the eye was made to be closed. SILFLO of said replica agent was adjusted, it applied to the outer canthus, and the replica was stripped after 3 minutes. In order to raise the precision of a judgment, a photograph of the obtained replica was expanded and taken. This was put into the album, the point that carried the frame of the square of the magnitude which becomes 1cm around on a photograph, and three or more leather slots met using a colony counter was made into one intersection, and the intersection number per unit area was measured. Consequently, although both real age was 35 years old when 2 and a test subject B evaluated those with 198-piece [/cm] 2, and this in the test subject A, using a texture granularity judging table 351 pieces/cm, the test subject B in the second half of the 20th generation was judged for the test subject A to be the texture granularity level in the first half of the 40th generation.

[0029] Texture granularity level evaluation using example 2 kit: General user C of 40 years old judged its own texture granularity level itself like the example 1 using this invention kit. 3 minutes after washing one's face, the replica was stripped, the frame of the square of 0.5cm around for limiting the count range on it was carried, and cellophane was carried further, and it pressed down with a clip so that it might not shift. Marking is carried out with the counter pen, using a magnifier, and the intersection number within the limit was counted. When the point that three or more leather slots on a skin front face met was made into one intersection and the intersection number within the limit was measured, the measured intersection numbers were 51 piece / 0.25cm2. It was judged with it

being in the average texture granularity level of the same age about this result as compared with a judgment table. [0030] Example 3 mouse skin light aging test: Ultraviolet rays UVB were irradiated at the regions-of-back skin of the hair loess mouse (hos:HR-1, 10 weeks old, female) of one groups [five] over week 3 time (namely, week 3 day) and every and ten weeks so that it might become with the continuous irradiation of 1-time 50 mJ/cm2 per day. The replica of the regions-of-back skin was extracted like the example 1, respectively before test initiation and after the four-week exposure, the seven-week exposure, and the ten-week exposure. As contrast, the replica of the regions-of-back skin was similarly extracted about this the week-old non-irradiating group (one groups [five]). A photograph of each replica was expanded and taken, this was put into the album, the frame for measurement of the square of the magnitude which becomes 1 cm around on a photograph was carried, the point that three or more leather slots met using a colony counter was made into one intersection, and the intersection number per unit area was measured. The result is shown in Table 5.

[0031]

[Table 5] 光老化マウスのキメ粗さ変化

	キメ交点数 (個/cm²; n=5の平均値)	
	非照射群	照射群
開始前	167	167
4 週照射後	1 5 2	9 5
7週照射後	1 5 5	7 8
10週照射後	1 5 6	4 1

[0032] That the texture of a mouse becomes coarse by ultraviolet rays has measured quantitatively so that clearly from Table 5. The model system of this UV irradiation mouse is useful as models of change of the texture of the Homo sapiens exposure section, such as a face, and useful also as a quantitive index of the texture evaluation in the animal model.

[0033] example 4 cosmetics -- measurement [of texture granularity change of the Homo sapiens at the time of use]: -- the outer-canthus section of right and left of the creams P and Q of the presentation shown in Table 6 to ten female test subjects from 29 years old to 47 years old by the half face -- 1-time 0.2g and a bis die -- it was made to use it for one month, and the texture granularity level before and behind use was measured like the example 1. About texture granularity change of the test subject before and behind the use obtained as a result of measurement, ten test subjects' average is shown in Table 7.

[Table 6]

	配合量(質量%)
成 分	クリームP	クリームQ
ベントナイト	0.50	0.50
テトラグリセリル	1.00	1.00
モノイソステアレート		
ヘキサグリセリル	0.80	0.80
モノステアレート		
グリセリルモノステアレート	1.50	1.50
P.O.E (40) グリセリル	1.50	1.50
モノステアレート		
グリチルレチン酸ステアリル	0.10	0.10
酸化型コエンザイムA	0.20	1
クレアチニン	0.30	_
パルミチン酸セチル	1.00	1.00
パルミチン酸イソプロピル	1.00	1.00
ジメチルシリコーン	1.00	1.00
スクワラン	8.00	8.00
ホホバ油	3.00	3.00
ローズヒップ油	0.05	0.05
セトステアリルアルコール	3.00	3.00
ベヘニルアルコール	0.50	0.50
グリセリン	1. 00	1.00 5.00
1. 3-ブチレングリコール	5.00	
ジプロピレングリコール	1.00	1.00 0.05
カルボキシビニルポリマー	0.05	0.05
(分子量100万~150万)	0.30	0.30
キサンタンガム プロピルパラベン	0.30	0. 10
メチルパラペン	0.30	0.30
ビタミンE	0.30	0.20
レグミンド クエン酸	微量	後量
クエン版 クエン酸ナトリウム	微量	微量
エデト酸2Na	0.10	0.10
グービリアエキス	0. 20	
トリイソプロパノールアミン	0. 10	0.10
精製水	パランス	バランス
香料	微量	微量

[0035] [Table 7]

[lable /]			
	キメ交点数 (個/cm²; n=10の平均値)		
試験区	クリームP	クリームQ	
開始前	182	189	
1ヶ月後	298	2 1 5	

[0036] It has been judged that it was effective in three components (oxidization mold coenzyme A, a creatinine, Derby rear extractives) which are contained in Cream P and contained in Q from this result improving texture granularity. [0037] evaluation [of texture granularity change of the Homo sapiens before and behind example 5 cosmetics use]: -- the outer-canthus section of right and left of the cream P of the presentation which the 42 years-old woman who is a general user shows in Table 6 -- 1-time 0.2g and a bis die -- it was used for one month and the texture granularity level before and behind use was measured like the example 2. Before use, 41 pieces / texture granularity which was 2 0.25cm increased with 53 piece / 0.25cm2 after use. When this result was judged by the judgment table of said table 1, it was "45 years old" before use, and after use was "40 years old." Thus, the general user has grasped the texture improvement effect of cosmetics quantitatively and simple like "extent rejuvenated 5 years old." [0038] The texture granularity improvement effect in an example 6 mouse skin light aging test: The optical aging mouse of a non-irradiating group and the exposure groups D, E, and F (one groups [five]) was created like the example 3. The exposure group D applied Liquid S back [bis die] for the liquid R of the following table 8 every [100micro / per animal / 1] in undisposed and the exposure group E after exposure termination at the exposure group F. The replica of the regions-of-back skin of each group was extracted like the example 3 one month after, and the intersection number was measured. The result is shown in Table 9. [0039] [Table 8]

	液組成(%)	
	液R	液S
酸化型コエンザイムA	_	0.5
ダービリアエキス	_	1. 0
クレアチニン	_	0.5
エチルアルコール	25.0	25.0
プロピレングリコール	50.0	50.0
精製水	25.0	23.0

[0040] [Table 9]

	キメ交点数	キメ交点数 (個/cm ² ; n=5の平均値)		
	非照射群 照射群 D 照射群 E 照象			
開始前	167	167	167	167
10週照射後	156	41	4 1	41
照射終了1ヶ月後	152	3 1	5 2	112

[0041] It has been judged that it was effective in three components (oxidization mold coenzyme A, a creatinine, Derby rear extractives) which are contained in Liquid S and contained in Liquid R in the model system of a UV irradiation mouse from the result of Table 9 improving texture granularity.

[0042] The texture granularity improvement effect in an example 7 mouse skin light aging test: In the same trial as an example 6, the texture granularity of the extracted replica was quantified in image analysis. The CCD camera was connected to the stereoscopic microscope, the replica was made into the digital image, and the average area per [which was measured in 2 an object area of 1.0x1.0cm by roux ZEKKUSU F (NIREKO, Inc.)] intersection was computed. The result is shown in Table 10. [0043]

[Table 10]

	キメ面積 (μm²/個; n = 5の平均値)			の平均値)
	非照射群	照射群D	照射群E	照射群F
開始前	6 0	6 0	6 0	60
10週照射後	6 4	244	244	244
照射終了1ヶ月後	66	3 2 3	192	8 9

[0044] It has been judged that it was effective in three components (oxidization mold coenzyme A, a creatinine, Derby rear extractives) which are contained in Liquid S and contained in Liquid R from the result of Table 10 even if it uses image analysis in the model system of a UV irradiation mouse improving texture granularity.

[0045]

[Effect of the Invention] this invention approach enabled it to measure and evaluate the texture granularity of the skin with individual difference by the simple index adapted to the actual condition. Moreover, by using the kit of this invention, the general user who does not have a know how can evaluate texture granularity simple, and becomes possible [grasping quantitatively and intelligibly the effectiveness before and behind use of one's texture granularity level or cosmetics]. Furthermore, it is very effective in selection and evaluation of the active principle which improves texture granularity.

JPO and NCIPI are not responsible for any damages caused by the use of this translation.

- 1. This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.**** shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

DESCRIPTION OF DRAWINGS

[Brief Description of the Drawings]

[Drawing 1] The mimetic diagram which expanded the condition of a skin front face or a replica.

[Drawing 2] The graphical representation showing the relation between the intersection number of the leather slot per two, and age 0.25cm of skins.

[Drawing 3] The graphical representation showing the relation between the intersection number of the leather slot per two, and age lcm of skins.

|Drawing 4| The graphical representation showing the relation between the area per intersection, and age.


[Description of Notations]


- 1 Leather Slot
- 2 Leather -- Hill
- 3 Intersection


JPO and NCIPI are not responsible for any damages caused by the use of this translation.

- 1. This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.**** shows the word which can not be translated.
- 3.In the drawings, any words are not translated.


DRAWINGS



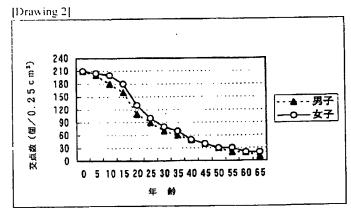



[Drawing 4]

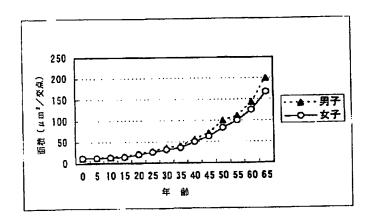

(19)日本国特許庁 (JP)

(12) 公開特許公報(A)

(11)特許出職公開發号 特開2001-170028 (P2001-170028A)

(43)公開日 平成13年6月26日(2001.6.26)

(51) Int.CL?		織別記号	F I	ラーマコージ(参考)
A61B	5/107		G01N 33/50	Q 2G045
G01N	33/50		A 6 1 B 5/10	300Q 4C038

密査諸球 未諸球 諸東項の数4 OL (全 9 回)

(22)出題日 平成11年12月16日(1999, 12, 16) 東京都盛田区本所1丁目3番7号 (72)発明者 小竹 由紀 東京都盛田区本所一丁目3番7号 ライオン株式会社内 (72)発明者 本山 順子東京都盛田区本所一丁目3番7号 ライオン株式会社内 (74)代理人 100112335 弁理土 藤本 英介 (外2名) アターム(参考) 20045 AA40 BB90 (B09 4013 VA04 VR22 WC20	(21)出職番号	物顧平11-359037	(71)出庭人 000008769
(72)発明者 小竹 由紀 東京都曼田区本所一丁目3番7号 ライオ ン様式会社内 (72)発明者 本山 順子 東京都曼田区本所一丁目3番7号 ライオ ン株式会社内 (74)代理人 100112335 弁理土 藤本 英介 (外2名) アターム(参考) 20045 AA40 BB90 (B09			ライオン株式会社
東京都墨田区本所一丁自3番7号 ライオン株式会社内 (72)発明者 本山 順子 東京都墨田区本所一丁目3番7号 ライオン株式会社内 (74)代理人 100112335 弁理士 藤本 英介 (外2名) アターム(参考) 20045 AA40 配約0 (2009	(22)出題日	平成11年12月16日(1989, 12, 16)	東京都墨田区本所1丁目3番7号
ン様式会社内 (72)発明者 本山 順子 東京都曼田区本所一丁月3番7号 ライオ シ株式会社内 (74)代理人 100112335 弁理士 藤本 英介 (外2名) アターム(参考) 20045 AA40 EB69 (2009		•	(72) 宠明者 小竹 由紀
(72)発明者 本山 順子 東京都曼田区本所一丁月3番7号 ライオ シ株式会社内 (74)代理人 100112335 弁理士 藤本 英介 (外2名) アターム(参考) 20045 AA40 EB90 (B09			東京都墨田区本所一丁月3番7号 ライオ
東京都曼田区本所一丁月3番7号 ライオン株式会社内 (74)代理人 100112335 弁理士 藤本 英介 (外2名) アターム(参考) 20045 AA40 EB90 (B09			ン株式会社内
ン株式会社内 (74)代理人 100112335 弁理士 藤本 英介 (外2名) アターム(参考) 20045 AA40 EMO (B09			(72) 発明者 本山 顺子
(74)代理人 100112335 弁理士 藤本 英介 (外2名) アターム(参考) 20045 AA40 EXPO (E09			東京都墨田区本所一丁月3番7号 ライオ
弁理士 藤本 英介 (外2名) アターム(参考) 20045 AA40 E269 (B09			ン株式会社内
アターム(参考) 20045 AA40 BB60 CB09			(74)代理人 100112335
· · · · · · · · · · · · · · · · · · ·			弁理士 藤本 英介 (外2名)
4/17:98 V40.4 VR22 VC20			アターム(参考) 20045 AA40 BB69 CB09
			4C038 VA04 VB22 VC20

(54) 【発明の名称】 皮膚のキメ迎さの測定方法およびキメ粗さ評価用キット

(57)【要约】

【課題】 皮膚表面のキメ組さレベルの客観的判定や、 化粧品等によるキメ粗さの改善程度を、安価、簡便かつ 定量的に数値で表現でき、専門知識を有しない一般ユー ザーにも手軽に測定が可能で、その意味を理解しやすい キメ組さの測定法を提供すること。

【解決手段】 皮膚表面上で皮澤が3本以上会合する点 を1交点とし、単位面積あたりの交点数を計測するか、 または交点1個あたりの平均面積を計測することによ り、皮膚のキメ組さを測定および評価する方法並びにそ のために用いるキット。

特闘2001-170028

(2)

【特許請求の範囲】

【請求項 】】 皮糖表面上で皮膚が3 本以上会合する点 を主交点とし、単位面積あたりの交点数を計測するか、 または交点1個あたりの平均面積を計測することによ り、皮膚のキメ組さを測定する方法。

【請求項2】 請求項1記載の方法により測定される皮 療のキメ粗さを、年齢との関係において統計的手段によ り解析することを特徴とする肌年齢の評価方法。

【請求項3】 請求項1記載の方法により測定される皮 廃のキメ粗さを、化粧品または薬効成分の適用の前後、 適用の有無もしくは適用量の多少との関係で比較解析す ることを特徴とする化粧品または薬効成分の効果の判定 方注。

【請求項4】 下記の(a)~(c)からなる皮膚のキ メ評価用キット。

- (a) 皮膚表面のキメを写し取るレブリカ材料
- (b) レブリカ上の交点数を計測するための計測用枠
- (c)キメ粗き判定表

【発明の詳細な説明】

100011

【発明の属する技術分野】本発明は、皮膚のキメの粗さ (あるいは、キメの細かさ)を測定する方法に関し、よ り詳細には、個人によって異なるキメの粗さや、皮膚外 用剤が持つキメ組さの改善効果を客観的に数値化し、専 門家だけでなく、一般ユーザーにも理解しやすい指標と して提供するキメの粗さの測定方法およびキメ組さの評 価用キットに関する。

[0002]

【従来の技術】皮痛の「キメ」とは、皮膚と皮丘から形 成される紋様であり、キメ組さは、皮膚の美しさに関与 30 する重要な因子としてよく知られている。従って、この キメ組さを測定・評価し、その程度を的確に把握するこ とは美容上、極めて重要なことである。

【りり03】従来、行われているキメ組さの測定方法と しては、シリコンラバー等を用いて皮膚表面形状を写し 取るレブリカ、あるいは直接皮膚表面を撮影し、コンピ ューター画像解析により數値化する方法が一般的であ る。そのような方法として、Oレブリカ撮影台、キセノ ン光源、テレビカメラ、イメージアナライザーなどの装 行光を照明することによって生じた影を撮影し、入力し た画像についてスムージング稿正後。一定レベルで二値 化して、皮膚による影領域を抽出し、皮膚間隔を測定す る方法 [林照次ち; J. Soc. Cosmet. Che m. Jpn. 27 (3) 355-373, 1993), OUVストロボ光源、CCDカメラ、デジタイザーなど の装置を用い、キメ粗さパラメーターとして、CCDカ メラでとらえた画像をデジタイザーに入力し、画像全体 の緯度分布を求め二値化画像を作成し、全体の総黒画素 数により皮海の密度を測定する方法〔高橋元次、現代皮 50 に存する。

廃科学大系、年刊版90-B、P13. (中山書店)1 990) が知られている。

【①〇〇4】しかしながら、上記方法は、高価なレブリ カや皮膚の画像入力装置、高度な画像解析ソフトを必要 とし、結果を示す数学的バラメーターは専門家でないと 解釈できない難解なものであり、一般ユーザーがキメの 状態を把握することは不可能なものであった。

【0005】また近年、一般ユーザーにわかりやすいキ メの評価法として、皮膚レブリカの凹凸を表面組さ計で 19 取りとみデジタル化し、ブーリエ変換によりパワースペ クトルを得、キメ粗さパラメーターとして、このパワー スペクトルの振幅を音として出力する方法も關発されつ つある (特関平4-305113号公報:特関平5-1 46412号公報)。しかし、この方法では高価な装置 と高度な画像解析ソフトを必要とし、その結果得られる パワースペクトルの振幅で、相対的なキメの良否は判断 できるものの。一般ユーザーがその意味を理解し、定量 的なキメレベルを把握することは不可能である。

【①①①6】また、顔の一部を確い際すことができる程 20 度の大きさのチエッカー基板で、その一部に測定対象肌 を見通すことができる切欠き部を形成し、キメ組さパラ メーターとして、前記切欠き部のすぐ近くのチエッカー 基板表面にキメのタイプの代表見本写真を数種表示し、 これと比較することによりキメの状態を把握する方法も 提案されている (特闘平9-262135号公報)。 し かし、この方法では、わずか3~4段階のキメの見本写 真と比較するため、精度のよいキメの評価は不可能であ り、化粧品等の効果を一般ユーザーが判断することはで きないものであった。

[0007]

【発明が解決しようとする課題】上述したように、従来 の方法は、高価な装置や高度な画像解析ソフトを必要と し、得られたキメの状態を示す数学的パラメーターは、 専門知識を有しない一般ユーザーには理解できないもの であった。また、簡便で一般ユーザーにわかりやすいも のは、精度が劣り定置性が不十分なものであった。

【()()()8】従って、本発明は、皮膚表面のキメ組さい ベルの客観的判定や、化粧品等によるキメ粗さの改善程 度を、安価、簡優かつ定量的に数値で表現でき、専門知 置を用い、キメ組さパラメーターとして、レブリカに平 40 識を有しない一般ユーザーにも手軽に測定が可能で、そ の意味を理解しやすいキメ組さの測定・評価法を提供す ることを課題とする。

[0009]

【課題を解決するための手段】本発明らは、鋭き研究の 結果。皮膚上の皮膚の交点数がキメ組さと一定の関係を 有するとの知見を得、これを指標として用いることによ り、キメ粗さの客観的かつ定置的な評価が可能であるこ とを見いだし、本発明を完成するに至った。

【0010】すなわち、本発明は以下の(1)~(4)

(3)

(1)皮膚表面上で皮燥が3本以上会合する点を1交点 とし、単位面積あたりの交点数を計測するか、または交 点1個あたりの平均面積を計測することにより、皮膚の キメ組さを測定する方法。

(2)上記(1)記載の方法により測定される皮膚のキ メ組さを、年齢との関係において統計的手段により解析 することを特徴とする肌年齢の評価方法。

(3)上記(1)記載の方法により測定される皮膚のキ **メ組さを、化粧品または薬効成分の適用の前後、適用の** を特徴とする化粧品または薬効成分の効果の判定方法。

(4) 下記の(a)~(c)からなる皮膚のキメ評価用 キット。

(a) 皮膚表面のキメを写し取るレブリカ材料

(b) レプリカ上の交点数を計測するための計測用枠

(c)キメ粗き判定表

[0011]

【発明の実施の形態】本発明方法において、キメ組さを 側定する際に計測の対象となる「皮膚表面上で皮膚が3 廃表面、または、そこから写し取られたレブリカの状態 を拡大した模式図である。皮膚上の皮膚1は、皮丘2を 聞むようにしながら、皮膚上を縦横斜めに走っている。 黒丸3は、皮潜が3本以上会合する点の一つを明示した ものである。このように本発明では、皮膚が3本以上会 台する点を「交点」として、その数を計測するものであ る.

【①①12】交点数の計測を行う部位は、皮膚表面であ れば特に制限はなく、例えば、顔面、腕等の任意の部位 に適用できる。

【りり13】キメ粗さの測定は、皮膚上の単位面積あた りの交点数を計測するか、または交点1個あたりの平均 面積を計削することにより行われる。ここで、交点数計 側のための単位面積は、後記するように年齢が高くなる に従い交点数が減少する(つまり、キメ細かさが失われ る)傾向が見られることから、被験者の年齢によって遺 **直設定することが好ましい。例えば、比較的キメの細か** い3 0代までを対象とする場合には、0.25 cm³の 単位面積を設定し、比較的キメの粗い40代以上を対象 とする場合は、1cm'の単位面積を設定することがで きる。もっとも、キメの組さ、細かさは、年齢以外に、 性別、健康状態、スキンケアの頻度等の条件によって大 きな幅があり、個人差も大きいことから、上記面積値は あくまでも一応の目安であり、通常は敷種類の単位面積 で測定できるように準備しておくことが好ましい。計測 に際しては、数箇所の交点数の測定結果から平均値を求 めることが好ましい。一方、交点1個あたりの平均面積 を計測する場合には、適宜設定した面積の枠内において 計測される1以上の交点数から、交点1個当たりの面積 を算出して、その平均を求めればよい。

【①①14】交点数を計測する際には、計測用枠を用い ることが好ましい。この計測用枠は、その材質や形状等 に特に制約はなく、一定面積の枠中において、交点を観 祭し、計割できるものであればよい。 例えば、紙、台成 樹脂、ガラス等の材質でできた薄い板状、フィルム状等 の部村に、例えば、正方形、円形等の所定面積の枠が設 けられたものが好適に用いられる。この枠は、一定面積 を規定できる手段であれば特に制約がなく、例えば、上 記部村の一部または全部に、湯やイング等により錨かれ 有無もしくは適用量の多少との関係で比較解析すること 10 たものや、上記部材中の所定面積が切除されたもの、さ ろには当該切除部位に透明な部材(例:ガラス、合成樹 脂フィルムなど)を張り付けたもの等を挙げることがで

【0015】また、交点数の計測は、直接皮膚表面にお いて行うことができるが、例えばレブリカ材料を皮膚に 適用することによって写し取られたレブリカ上で行うこ とも可能である。レブリカ材料としては、例えば、シリ コンラバーに硬化剤を滴下する2液混合タイプのもの や、セルロイド板(SUMP法:Suzukn's universalm 本以上会合する点」を図面により説明する。図1は、皮 20 teroprinting法)などが挙げられるが、皮膚表面のキメ が観察できるものなら特に訓約なく利用できる。レブリ 力を実施する際には、付属品を使用する場合があり、例 えば上記の2液混合タイプでは、液を摂掉するためのシ ート(シリコンが浸透しにくいトレーシングペーパーの ような材質)、搬拌さじ(パテのような、発泡せずによ く捌鉢できるもの)等を使用することがあるが、これら も本発明のレブリカ材料に含まれる。

> 【0016】上記方法により、皮膚のキメ粗さを測定す ることが可能であるが、得られた測定結果を統計データ と比較することにより、キメ粗さの評価を容易に行うこ とができる。すなわち、例えば、上記方法により測定さ れる皮膚のキメ組さを年齢との関係において統計的手段 により解析することにより、肌年齢の評価を行うことが できる。この場合の評価は、測定された交点数を、キメ 粗さレベルをわかりやすく示した判定表と比較すること により行われる。このキメ組さ判定表は、年齢や性別の 異なる多数のサンブルから、年齢と単位面積当たりの交 点数(または)交点当たりの面積)との関係を示す検査 根を作成し、その結果をわかりやすく數値化して年齢別 40 の表形式にしたものである。ここでは、一例として① 歳 から65歳までの男女218名の交点数を測定した。そ の結果得られた検査線に基づき作成した判定表を、以下 の表1、表2、表3として示す。また、表1、表2、表 3に対応する検量線を、それぞれ図2、図3、図4に示

[0017]

【表1】

50

特闘2001-170028

(4)

[0018] 【表2】

	交点数(個/cm²)		
年齢	易 子	ᆽ구	
0	840	840	
5	800	820	
10	720	800	
15	620	700	
20	450	500	
25	360	400	
30	280	320	
3.5	250	280	
40	180	200	
4.5	140	160	
50	100	120	
5.5	8.0	100	
60	70	80	
6.5	50_	60	

[0019] 【表3】

	面徵(#m²/交点)		
辞 寻	男 子	女子	
0	12	12	
5	13	12	
10	14	18	
1.5	16	14	
2 0 2 5	22	20	
25	28	25	
3 0	36	31	
3 5	40	3 6	
40	56	50	
45	7.1	63	
5.0	100	8.8	
5.5	111	100	
60	148	125	
6.5	200	187	

【① ① 20】表 1 に示す判定表は、交点数計測の単位面 50 し、枠内の交点数を計測することにより行われる(図 1

箱をり、25cm*に設定したものであり、表2に示す 判定表は同単位面積を1cm'に設定したものである。 また、表3に示す判定表は、交点当たりの面積を示すも のである。キメ組さレベルは性別により異なるため、判 定表1~3では、男女を別けて示した。使用者は測定に 用いた枠の大きさに対応する判定表を使い、測定結果と 対比することにより、キメ組さレベルの評価ができる。 この判定表を利用することにより、使用者は自分のキメ 担さがどのレベルにあるのかを定置的かつ簡便に把握で 10 きるので有利である。また、化粧品や薬効成分の使用等 によりキメの組さが改善したかどうかについて、使用前 後等の交点数を計測し比較することで、定置的に変化を 把握することも可能である。すなわち、上記記載の方法 により測定される皮膚のキメ粗さを、化粧品や薬効成分 等の適用の前後、適用の有無または適用量の多少との関 係で比較解析することにより、化粧品や薬効成分等の効 星の判定を行うことができる。

【10021】本発明によるキメ粗さの測定および評価に 使用する器具や判定表は、これらをひとまとめに備えた 20 キットとすることもできる。本発明による皮膚のキメ評 価キットは、少なくとも下記の(a)~(c)を含む。

- (a) 皮膚表面のキメを写し取るレブリカ材料
- (b) レブリカ上の交点数を計測するための計測用枠
- (c)キメ粗さ判定表

【0022】キットを構成する(a)~(c)の器具等 は前記のものが用いられ、その使用方法や評価手段は、 本発明方法に従い行われる。

【0023】本発明キットの使用方法等の具体例を挙げ ると以下のとおりである。レブリカ村科(a)およびキ 30 メ判定表 (c) としては、前記したものを用いた。レブ リカの交点数をカウントするための計測用枠(b)は、 正方形とし、評価対象者のキメ粗さレベルによって使い 分けられるよう。1cm四方(キメの狙い40代以降を 対象)、0.5mm四方(キメの細かい30代までを対 象)など数種類を準備した。ここで、本発明キットは、 例えば、カウントを容易にするための拡大鏡、マークし ながらカウントするためにレブリカに貼り付けるセロフ ァン(透明のものなら何でもよい)、前記セロファン等 をとめるクリップなどを含むものであってもよい。 さら 40 にはマーキングとともにカウントが表示される。カウン ターペンを含むといっそう便利である。

【0024】使用者はまず、レブリカ剤をシート上でパ テにて混合し、鏡を見ながら顔の評価したい部分に塗り つける。3分後にレブリカをはがし、その上にカウント 範囲を限定する透明な枠をのせ、さらにセロファンをの せて、ずれないようにクリップで押さえる。拡大鏡を使 いながらカウンターペンでマーキングしていき、枠内の 交点数をカウントしていく。前記したように、カウント は皮膚表面上の皮膚が3本以上会合する点を1交点と

(5)

特闘2001-170028

参照)。キメ組さの評価は、キメ粗さ判定表(c)から 交点数に対応する年齢を読み取ることにより行われる。 [0025]

【実能例】次に、実施例、試験例により、本発明を更に 詳細に説明するが、本発明はこれらに副約されるもので はない。

【0026】実施例1

ヒトのキメ粗さレベル評価:35歳女性被験者2名

* (A、B) について、被験者とは異なる評価者がキメ粗 さレベルを測定した。レプリカ剤として、SILFLO (英国 FLEXICO DEVELCIMENTSLTD、社製)を用いた。被験部位 に油分が存在するとレプリカがうまく固まらないため、 **金銭 は 表名に 示す 洗顔料(クリーム状洗浄剤組成** 物)を用いてよく洗顔させた。

[0027]

【表4】

成分	配合型(質型%)
ラウリン酸	2. 0
ミリスチン敵	18.0
パルミチン酸	8. 0
ステアリン酸	8. 0
N-ラウロイル-N-メチル	3. 0
-β-アラニンカリウム	
N-ラウロイルグルタミン酸	2. 0
モノカリウム塩	
水散化カリウム	5. 5
グリセリン	5. 0
PEG4000	5. 0
ソルビトール	6. 0
オレイルアルコール	1. 0
精製ラノリン	0. 5
植物性スクワラン	0. 5
カチオン化セルロース (*1)	0. 5
ヒドロキシエタンジホスポン酸	0. 1
エデト酸四ナトリウム四水塩	0. 2
塩化カリウム	0. 2
春料	2. 0
精製水	パランス

*1:ライオン化学製XM-503LN岩しくはレオガードGP またはUCC社製ポリマー-JR400

【10028】また、緊張を伴うとキメの状態が変化する ため、測定に際しては、可倒式のゆったりしたイスに構 40 と判定された。 たわらせ、目を閉じさせた。前記レブリカ剤のSILFLOを 調整して目尻に塗布し、3分後にレブリカをはがした。 得られたレプリカは判定の請度を上げるために拡大して 写真撮影した。これをアルバムに入れて、写真上で1c m四方となる大きさの正方形の枠をのせコロニーカウン ターを用いて皮溝が3本以上会合する点を1交点とし、 単位面積あたりの交点数を計測した。その結果、接験者 Aは351個/cm'. 被験者Bは198個/cm'あ り、これをキメ組さ判定表を用いて評価したところ、実

20代後半の、按験者Bは40代前半のキメ粗さレベル

【0029】実施例2

キットを用いたキメ粗さレベル評価: 実施例1と同様に して、40歳の一般ユーザーCが、自分自身のキメ粗さ レベルを本発明キットを用いて自ら判定した。洗顔して 3分後にレブリカをはがし、その上にカウント範囲を限 定するための(). 5 c m四方の正方形の枠をのせ、さら にセロファンをのせて、ずれないようにクリップで押さ えた。拡大鏡を使いながらカウンターペンでマーキング していき、枠内の交点数をカウントした。皮膚表面上の 年齢がともに35歳であるにもかかわらず、被験者Aは 50 皮溝が3本以上会合する点を1交点とし、枠内の交点数

を計測したところ、測定された交点数は、51個/0. 25 cm'であった。この結果を判定表と比較すると、 同年代の平均的なキメ粗さレベルにあると判定された。 【0030】実施例3

マウス皮膚光老化試験:1群5匹のヘアレスマウス(b os:日R−1、10週齡、難)の背部皮膚に繁外線U VBを、1日あたり1回50mJ/cm⁴の連続照射と なるように、週3回(ずなわち、週3日)ずつ、10週 間にわたり照射した。試験開始前、4週照射後、7週照 財後、および10週照射後に、それぞれ実施例1と同様*10 先老化マウスのキメ粗さ変化

*にして背部皮膚のレブリカを採取した。対照として、同 **週齡非照射群(1群5匹)についても同様に背部皮膚の** レブリカを採取した。各レブリカを拡大して写真撮影 し、これをアルバムに入れて、写真上で1cm四方とな る大きさの正方形の計測用枠をのせ、コロニーカウンタ ーを用いて皮膚が3本以上会合する点を1交点とし、単 位面積あたりの交点数を計測した。その結果を表5に示

特闘2001-170028

[0031] 【表5】

	ルメ交点数(個/cm¹; n=5の平均億)		
	非限計器	原射器	
開始前	167	187	
4週限對後	152	95	
7週度射後	155	78	
10型限制後	156	4 1	

(6)

【0032】表5から明らかなように、紫外線によって マウスのキメが組くなるととが定置的に測定できた。こ の熱外被照射でウスのモデル系は、顔などヒト躍光部の キメの変化のモデルとして有用なものであり、また、動 物モデルにおけるキメ評価の定置的な指標としても有用 である。

【0033】実施例4

化粧品を使用時のヒトのキメ粗さ変化の測定:29歳か。

647歳までの女性被験者10名に対し、表6に示す組 成のクリームPおよびQをハーフフェイスで左右の目尻 部に1回(). 2g、1日2回、1ヵ月間使用させ、使用 前後のキメ粗さレベルを実施例1と同様に測定した。測 定の結果得られた使用前後の破験者のキメ粗さ変化につ いて、被験者10名の平均値を表7に示す。

[0034]

【表6】

	配合量(質量%)			
成分	クリームP	クリームQ		
ベントナイト	0.50	0.50		
テトラグリセリル	1.00	1.00		
モノイソステアレート				
ヘキサグリセリル	0.80	0.80		
モノステアレート				
グリセリルモノステアレート	1.50	1.50		
P.O.E (40) グリセリル	1.50	1.50		
モノステアレート				
グリチルレチン酸ステアリル	0.10	0.10		
酸化型コエンザイムA	0.20	-		
クレアチニン	0.30	_		
パルミチン酸セチル	1.00	1.00		
パルミチン酸イソプロピル	1.00	1.00		
ジメテルシリコーン	1.00	1.00		
スクワラン	8.00	8.00		
ホホバ油	3.00	3.00		
ローズヒップ油	0.05	0.05		
セトステアリルアルコール	3.00	3.00		
ベヘニルアルコール	0.50	0.50		
グリセリン	1.00	1.00		
1. 3ープチレングリコール	5.00	5.00		
ジプロピレングリコール	1,00	1.00		
カルボキシビニルポリマー	0.05	0.05		
(分子量100万~150万)		l		
キサンタンガム	0.30	0.30		
プロビルバラベン	0.10	0.10		
メチルバラベン	0.30	0.30		
ビクミンE	0.20	0.20		
クエン酸	松 量	毅 置		
クエン酸ナトリウム	経量	数盘		
エデト酸2Na	0.10	0.10		
ダービリアエキス	0.20			
トリイソプロパノールアミン	0.10	0.10		
精製水	パランス	パランス		
	数量	数量		

[0035]

* * 【表7】

	キメ交点数 (個/cm*; n=10の平均値)		
試験区	クリームP	クリームQ	
開始前	182	189	
1ヶ月後	298	215	

【①①36】この結果より、クリームPに含まれ、Qに 含まれない3成分(酸化型コエンザイムA、クレアチニ ン ダービリアエキス)がキメ粗さを改善するのに有効 40 きた。 であると判断できた。

11

【10037】実施例5

化粧品使用前後のヒトのキメ粗さ変化の評価:一般ユー ザーである42歳女性が表6に示す組成のクリームPを 左右の目尻部に1回(). 2g、1日2回、1ヵ月間使用 し 使用前後のキメ粗さレベルを実施例2と同様に測定 した。使用前には41個/0.25cm⁴だったキメ組 さは、使用後には53個/り、25cm'と増加した。 この結果を、前記表1の判定表により判定すると、使用 前は「45才」、使用後は「40才」であった。このよ 50 【0039】

うに一般ユーザーが、化粧品のキメ改善効果を、「5歳 若返る程度」というように定置的に、かつ簡便に把握で

【0038】実施例6

マウス皮膚光老化試験におけるキメ組さ改善効果:実施 例3と同様にして、非照射群、照射群D、EおよびF (1群5匹)の光老化マウスを作成した。照射終了後、 照射群Dは未処置、照射群Eには下記の表8の液Rを、 照射群Fには渡Sを、1日2回背部に1匹あたり100 μ1ずつ塗布した。1ヶ月後に各群の背部皮膚のレブリ カを実施例3と同様に採取し、交点数を測定した。その 結果を表9に示す。

(8)

特闘2001-170028 14

【表8】

	被組成 (%)		
	按R	被S	
酸化型コエンザイムA	-	0.5	
グービリアエやス	-	1.0	
クレアチニン	-	0.5	
エチルアルコール	25.0	25.0	
プロピレングリコール	50.0	50.0	
稍製水	25.0	23.0	

[0040]

* *【表9】

	キメ交点数(個/cm*; n=5の平均値)			
	非限別群	原射群で		
開始前	167	167	167	167
10超短射後	156	41.	41	41
照射終了1ヶ月後	152	31	5 2	112

【0041】表9の結果より、紫外線照射マウスのモデル系においても、液Sに含まれ、液Rに含まれない3成分(酸化型コエンザイムA、クレアチニン、ダービリアエキス)がキメ組さを改善するのに有効であると判断できた。

13

【0042】実施例7

マウス皮膚光老化試験におけるキメ組さ改善効果:実施例6と同様な試験において、経取したレブリカのキメ粗※

※さを画像解析にて定置化した。レブリカを裏体顕微鏡に CCDカメラを接続してデジタル画像とし、ルーゼック スF (株式会社ニレコ)にて、対象面積1.0×1.0 cm[†]において、測定された交点1個あたりの平均面積 を算出した。その箱果を表10に示す。

[0043]

【表10】

	キメ面嶺(μm²/個;n=5の平均値)				
	非照射器 照射群 D 照射群 E 阻射群				
開始前	60	60	60	60	
10超限射後	64	244	244	244	
照射終了1ヶ月級	6.6	323	192	89	

【りり44】表10の結果より、紫外線照射マウスのモデル系において画像解析を用いても、液Sに含まれ、液Rに含まれない3成分(酸化型コエンザイムA、クレアチニン、ダービリアエキス)がキメ組さを改善するのに有効であると判断できた。

[0045]

【発明の効果】本発明方法により、個人差がある皮膚のキメ組さを実態に即した簡優な指標により制定・評価することが可能となった。また、本発明のキットを用いることにより、専門知識を有さない一般ユーザーが簡便にキメ組さを評価でき、自分のキメ粗さレベルや化粧品の使用前後の効果を定置的にかつわかりやすく把握することが可能となる。さらには、キメ粗さを改善する有効成分の過定や評価に極めて有効である。

【図面の簡単な説明】

【図1】 皮膚表面またはレブリカの状態を拡大した模式図。

【図2】 皮膚(). 25 c m¹ 当たりの皮膚の交点数と 40 年齢との関係を示すグラフ図。

【図3】 皮膚1cm゚当たりの皮縷の交点敷と年齢との関係を示すグラフ図。

【図4】 1 交点当たりの面積と年齢との関係を示すグラフ図。

【符号の説明】

- 1 皮海
- 2 皮丘
- 3 交点

